

Sistema preassemblato L Plus/LC Plus

Pre-assembled L-frame for hanging toilets and bidets.



Full brick in brick
Semi-solid brick (perforated vertically) in brick

ADVANTAGES

- LC plus with shaped crossbar for the thrown out of the rinse box.
- L plus with straight crossbar for use bidet or toilet with late-placement recorder.
- Kit complete with eccentric bushings

BUAK, M12 bars and nuts.
Pre-assembled system with centre

- distance 180 mm and can be adjusted up to 230 mm.
- Barre M12 lunghe 180 mm.
- Tested at 400 kg according to UNI EN 997 and UNI EN 14528 standards.
- Application with any built-in cassette.
- Floor support base without protruding screws.

APPLICATIONS

WC and bidet suspended on load-bearing walls

OPERATION

Insert the M12 bars with the protection red ion.

Fix the bracket to the wheelbase necessario.


Install in the wall and rinzaffare.

Remove the red protection, install the sanitary and fix the nuts by covering


with the BUAK bushings.

Sistema preassemblato L Plus/LC Plus

INSTALLATION L PLUS

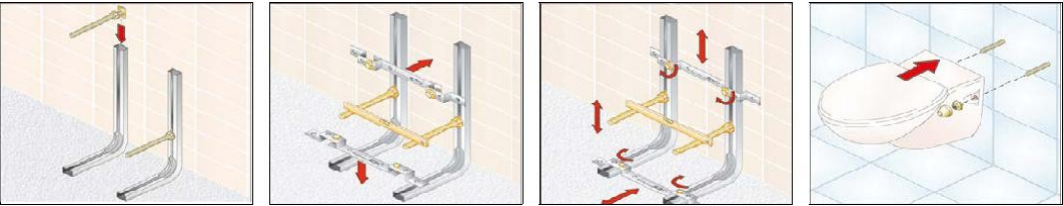

INSTALLATION LC PLUS

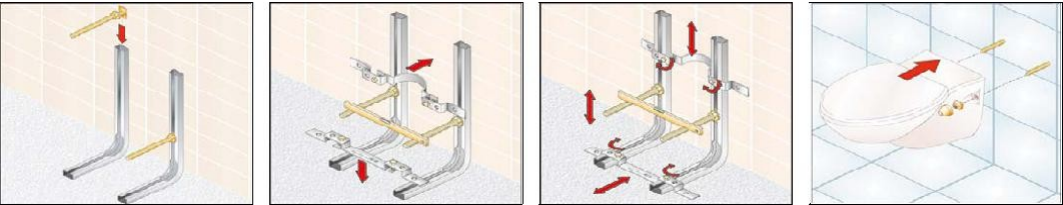

TECHNICAL DATA



Universal pre-assembled system **L Plus** Universal pre-assembled system **LC Plus**

Product	Art. No	Height L ₁ [mm]	Breadth L ₂ [mm]	Wheelbase L ₃ [mm]	Packaging [pz]
L PLUS¹⁾ LC PLUS¹⁾	501023	600	200	180/230	1
	501026	600	200	180/230	1

1) Registered model.

ACCESSORIES



Anti-noise membrane for
suspended sanitary



BUAK for suspended sanitary ware

Packaging

Product	Art. No	Package with	[pz] 50 25
Anti-noise membrane	004824	1 Anti-noise membrane	
BUAK	071283	2 BUAK M12	

